

ASSEMBLING THE R16


1. STARTING POSITION




(MAKE SURE YOUR HANDS ARE CLEAN AND GREASE-FREE)




2. REMOVE CORK AT THE INDICATED END

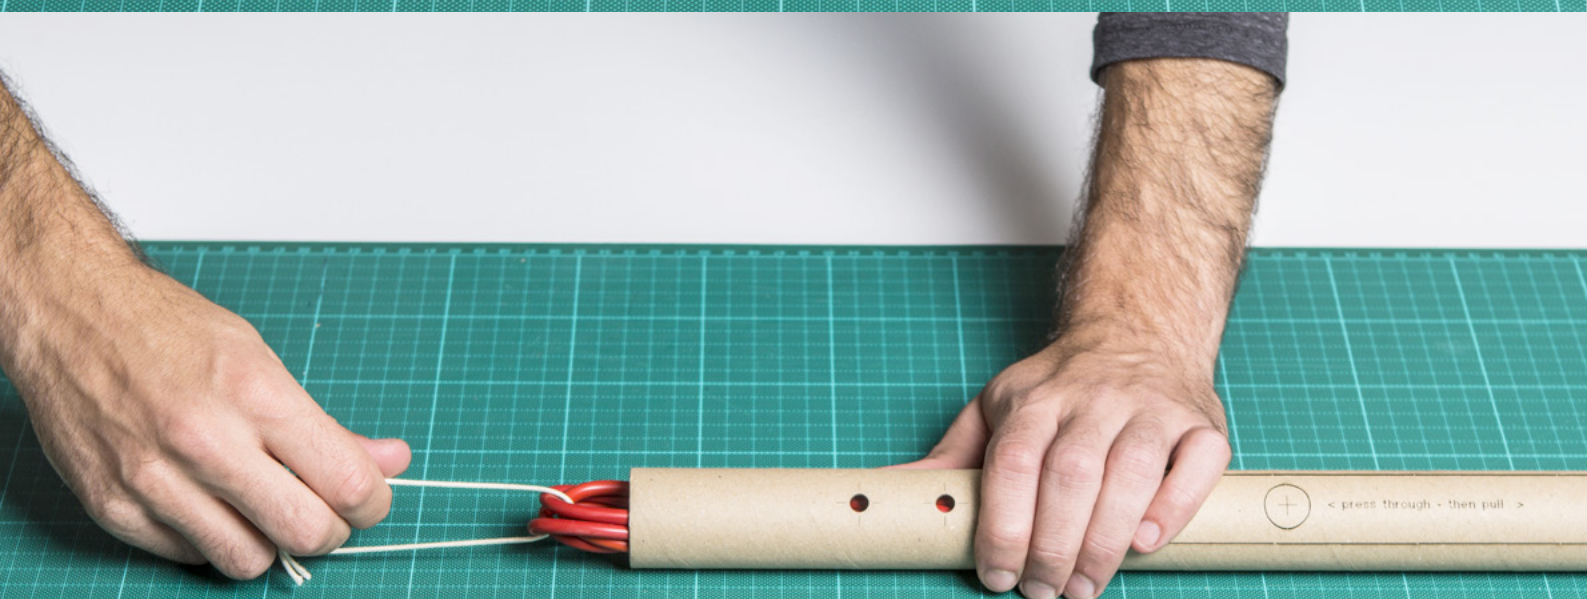

3. PULL OUT THE COTTON CORD

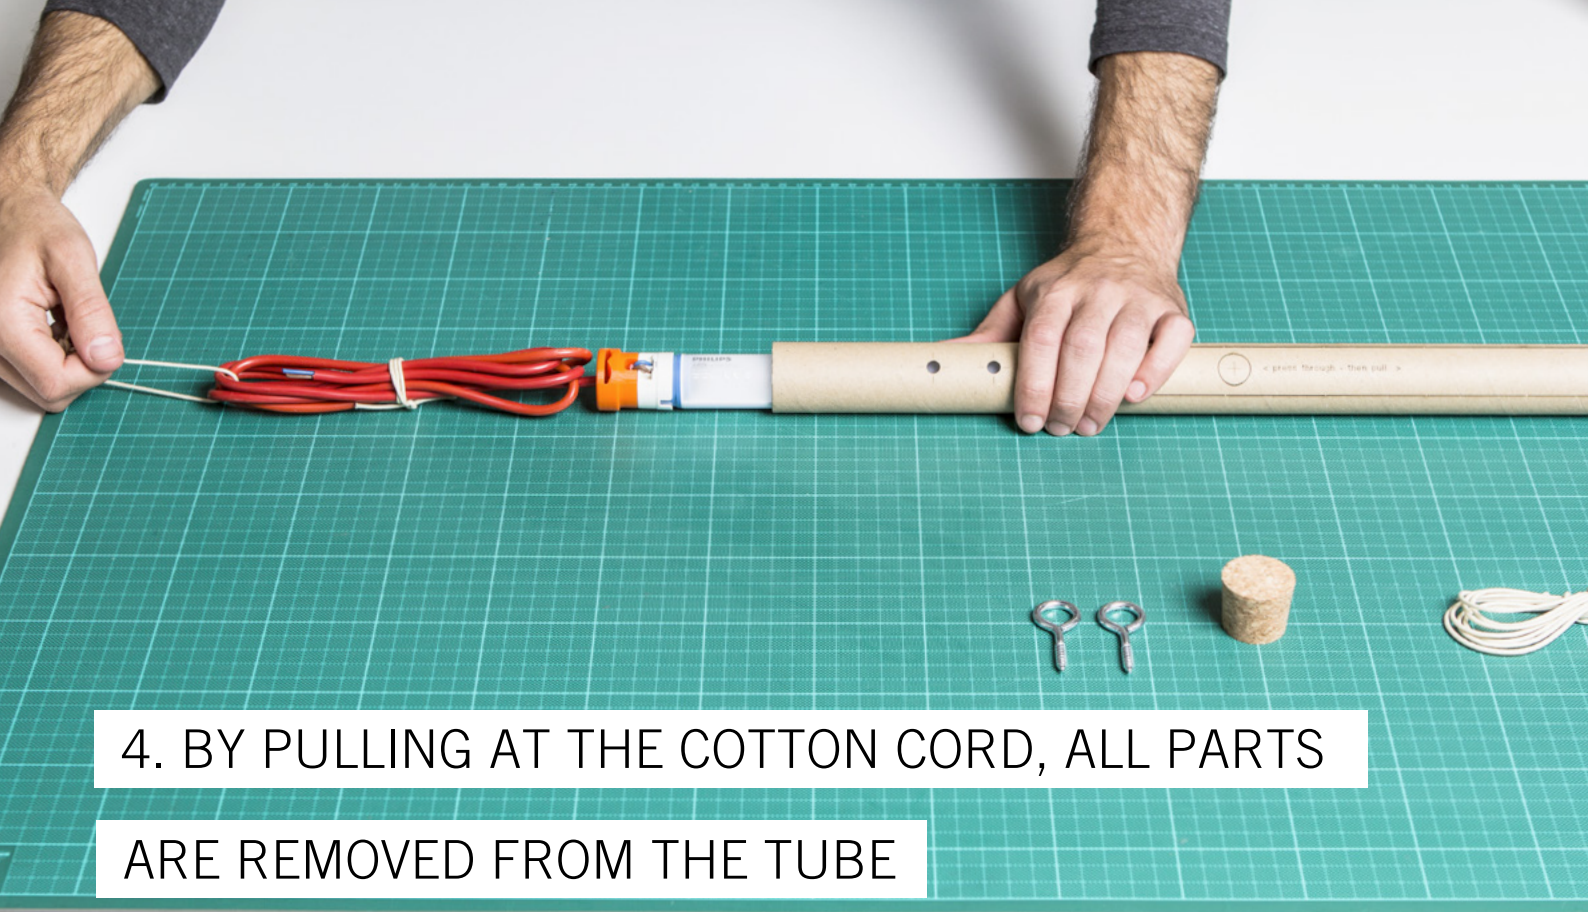

4. BY PULLING AT THE COTTON CORD, ALL PARTS ARE REMOVED FROM THE TUBE

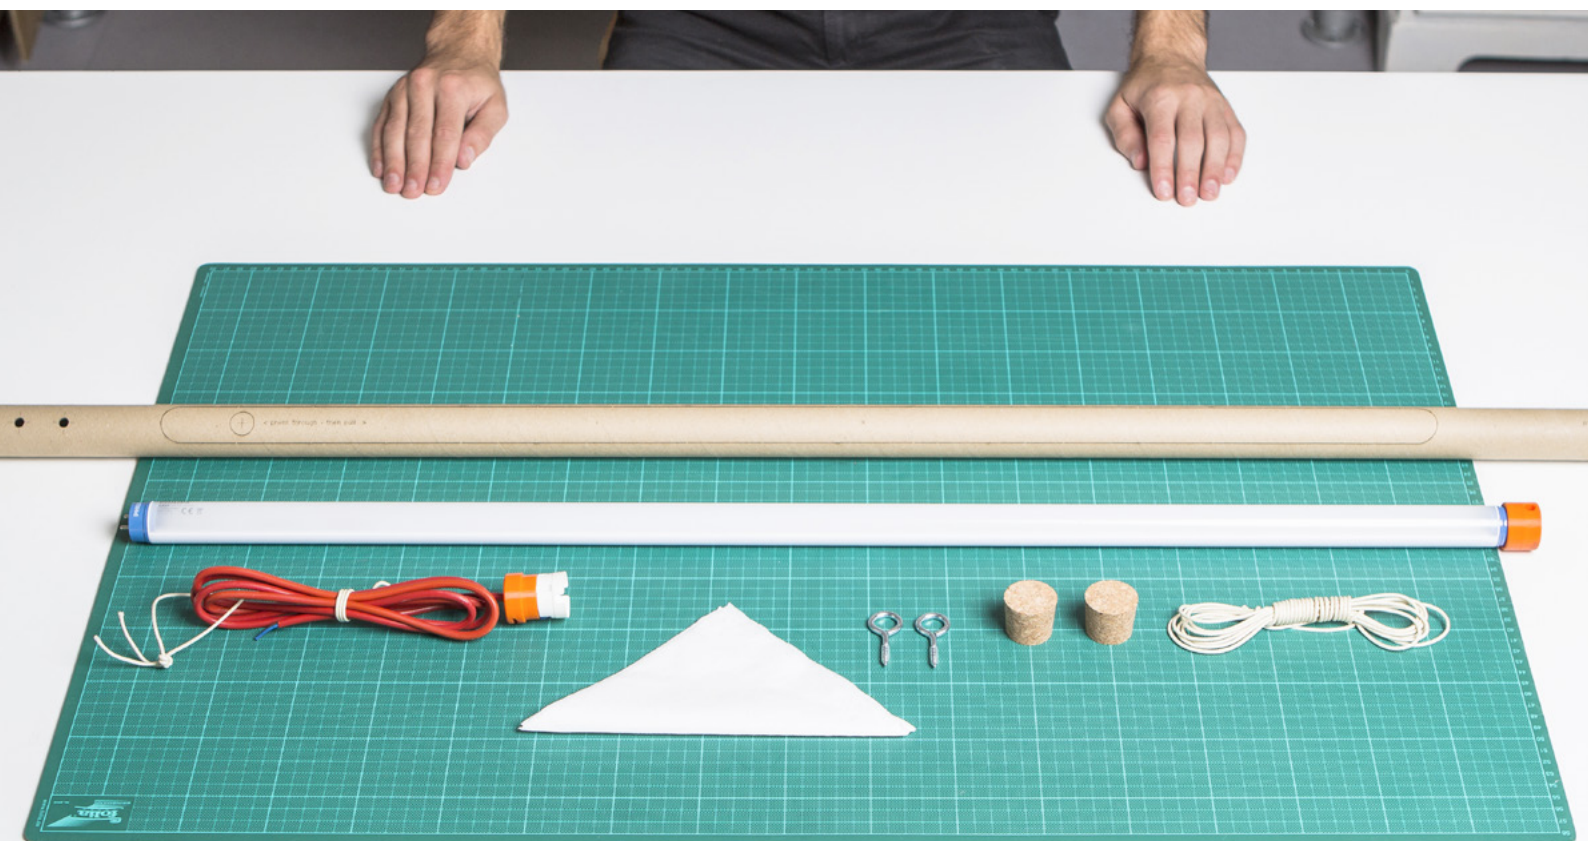

5. HAVE A NAPKIN OR PIECE OF CLOTH READY




6. GENTLY PRESS THROUGH THE ROUND HOLE



7. CAREFULLY PULL OUT THE STRIP




8. MAKE SURE TO CLEAN YOUR HANDS AFTER THE LAST STEP, THE LASER CUT SIDES DO GIVE OFF SOOT (ROET)

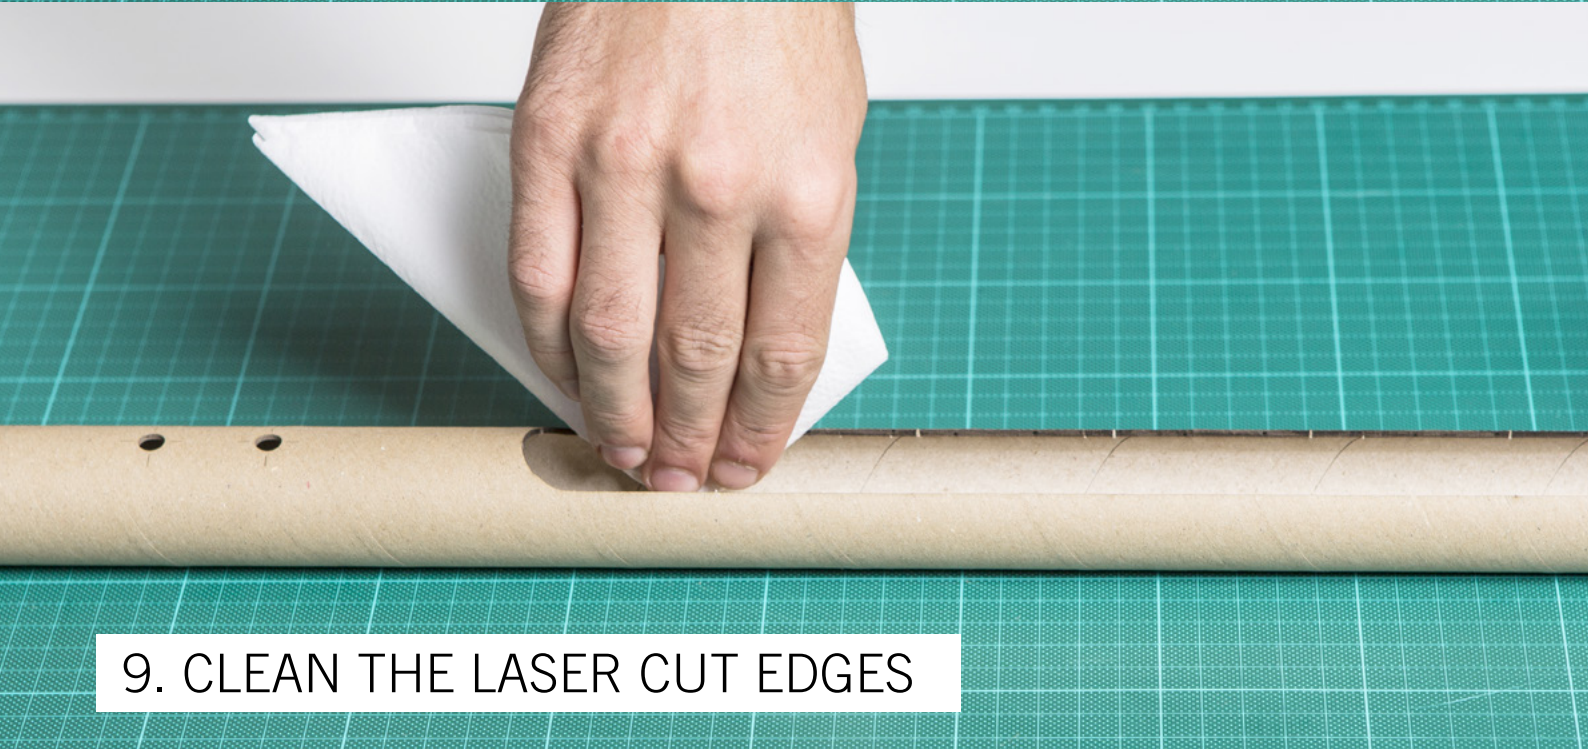

9. CLEAN THE LASER CUT EDGES




10. SOOT WILL STAIN CARDBOARD, MAKE SURE TO REMOVE ALL

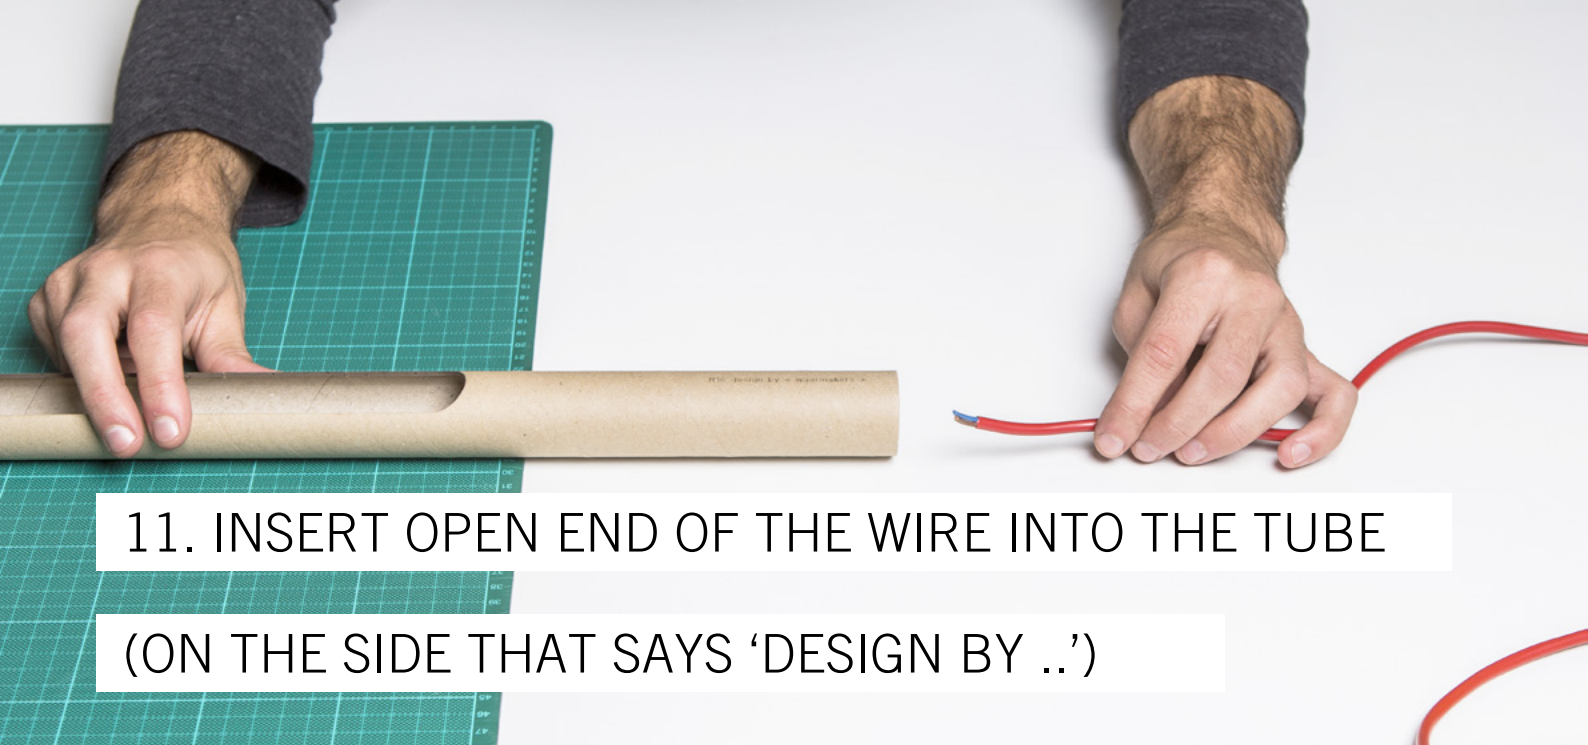

11. INSERT OPEN END OF THE WIRE INTO THE TUBE
(ON THE SIDE THAT SAYS 'DESIGN BY ..')




12. LEAVE THE LIGHT IN THE FITTING AND PUSH IT
IN AFTER THE WIRE

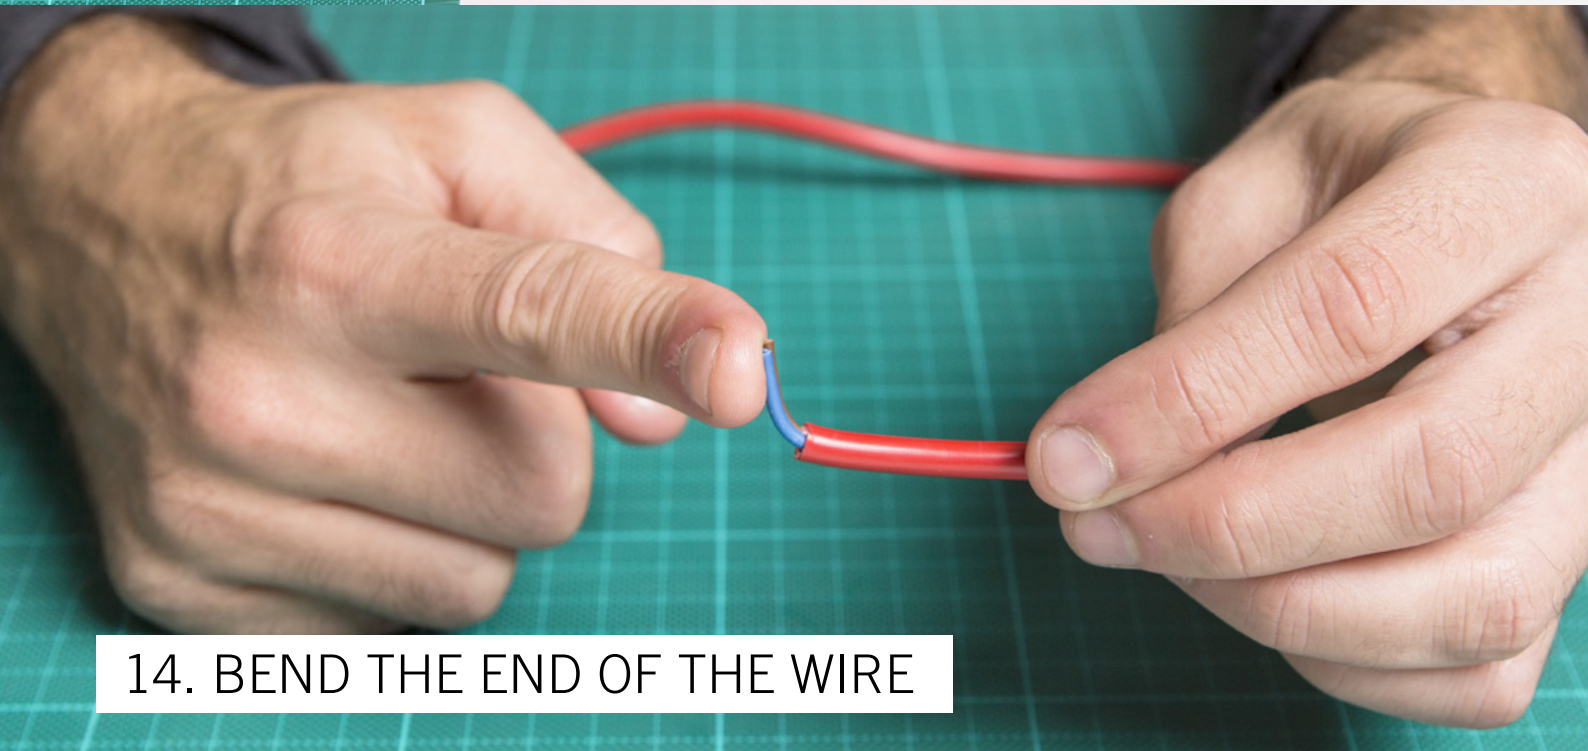


14. BEND THE END OF THE WIRE


15. PULL THE WIRE ALL THE WAY THROUGH TO THE OTHER END OF THE OPENING (WITH THE LED LAMP ATTACHED)

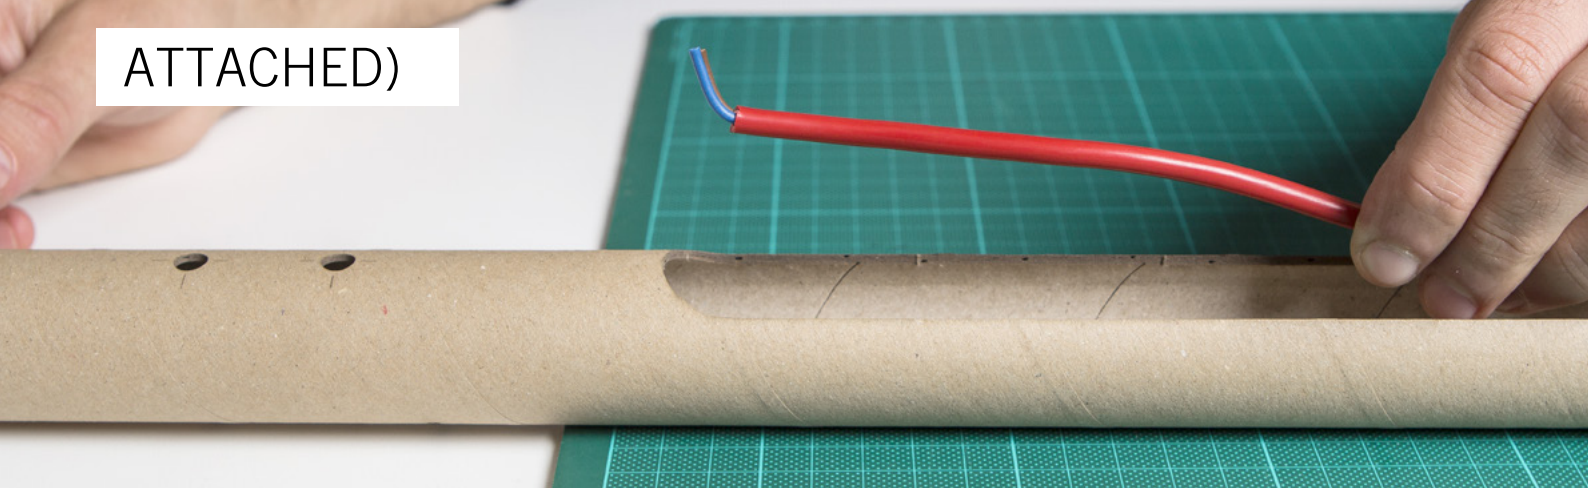

15. SKILLFULLY PUSH THE BENDED END THROUGH THE CLOSEST HOLE

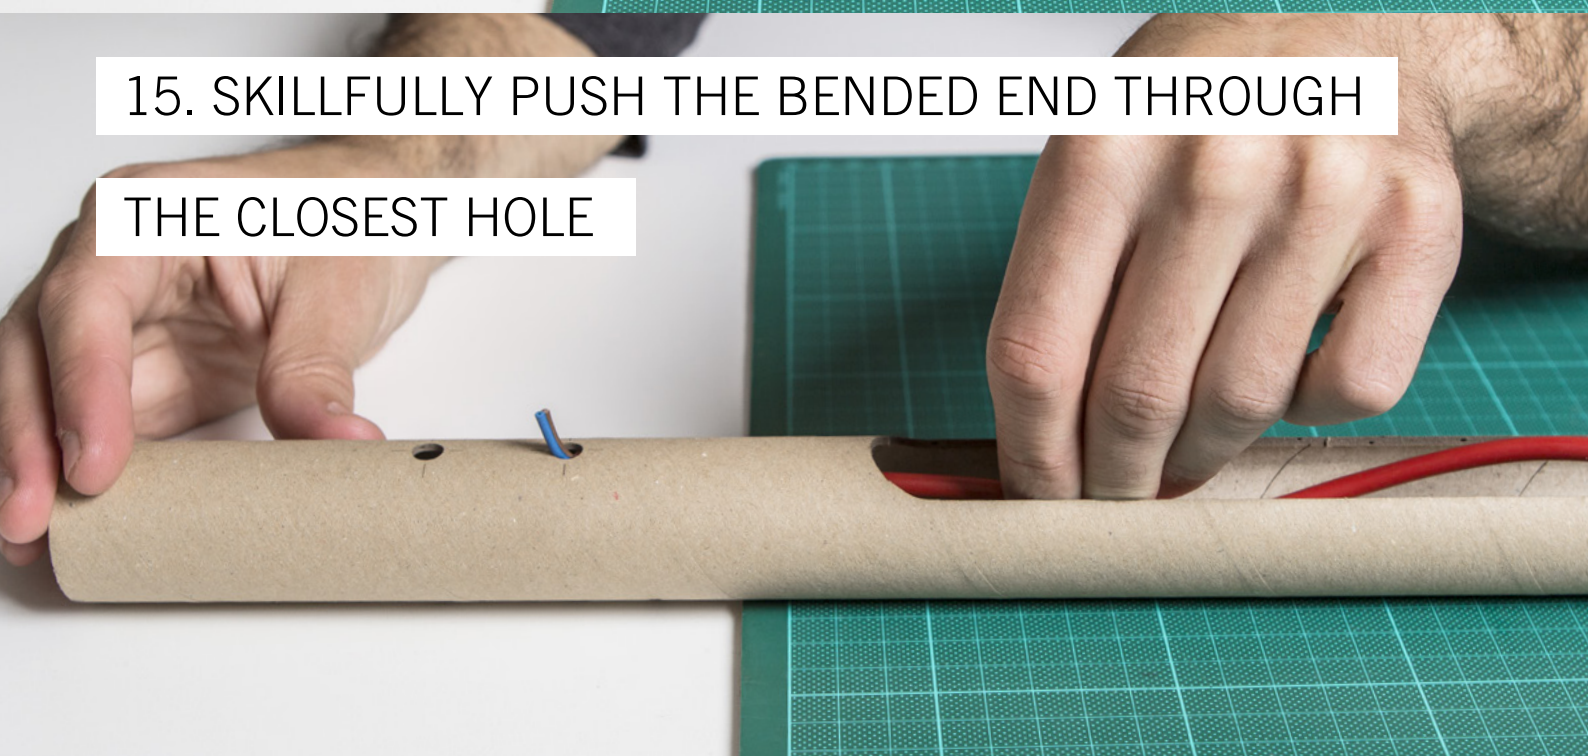

16. GENTLY PULL AND GUIDE THE ENTIRE WIRE THROUGH

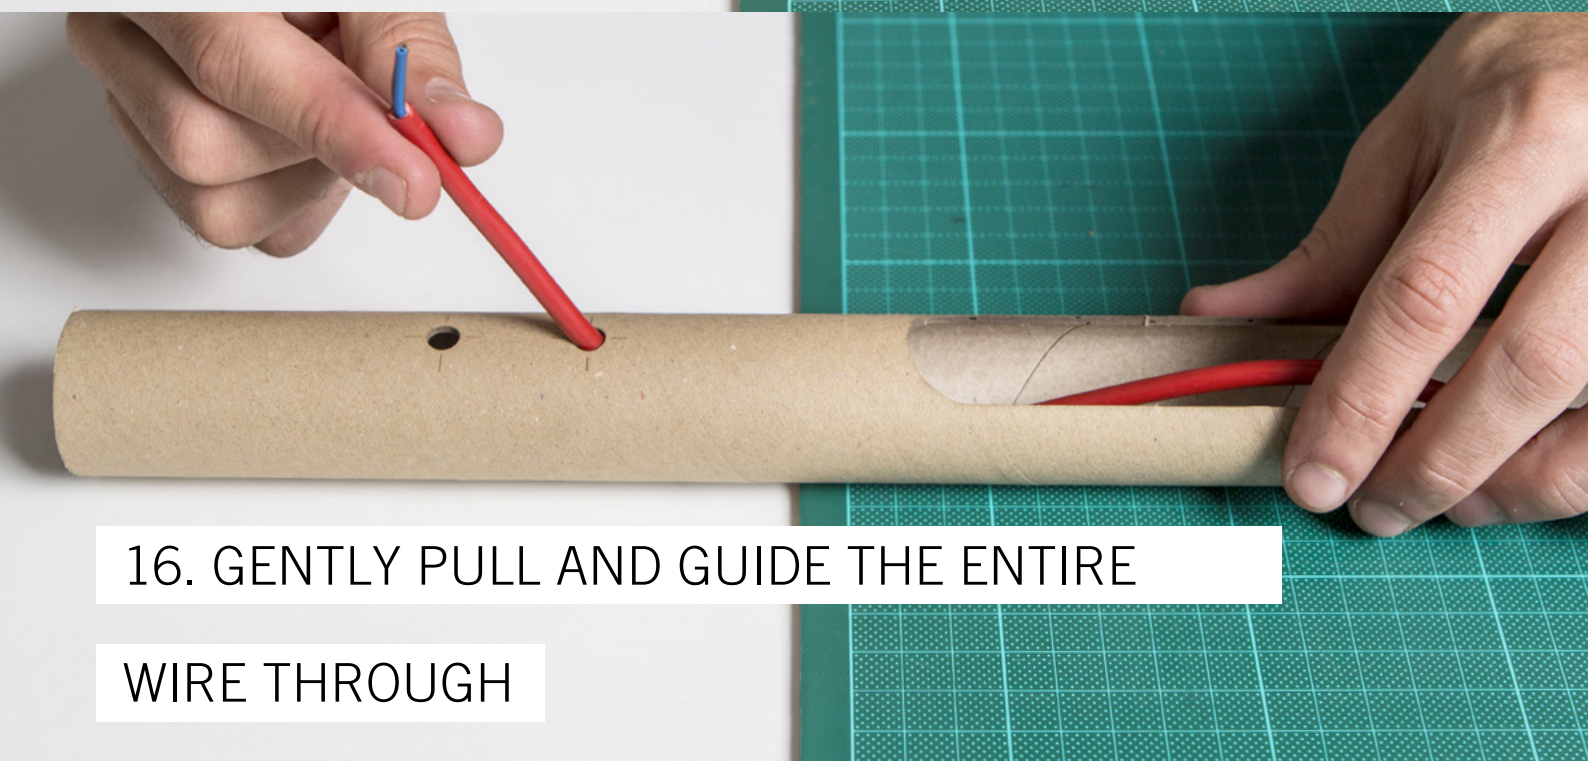



17. PUSH THE WIRE THROUGH THE TWO OPPOSING HOLES



18. AGAIN, PULL IT ALL THE WAY THROUGH

(OBJECT IS TURNED OVER HERE)


ON THE OTHER SIDE THE HOLE FOR THE COIN IN THE FITTING WILL BE VISIBLE THROUGH THE CARDBOARD



19. PUSH IN A 5 CENT COIN TO FIX THE LAMP


ON THE OTHER END THE HOLE FOR THE PENCIL

WILL BE VISIBLE (IT MIGHT BE SLIGHTLY TURNED)

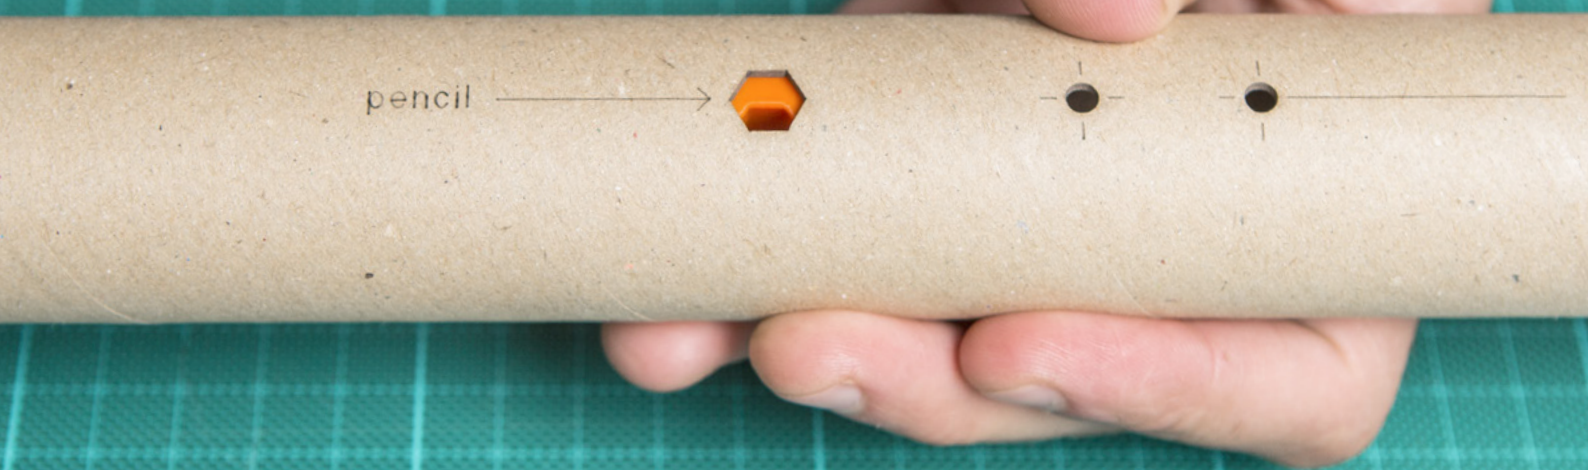


20. PUSH IN A PENCIL OF YOUR CHOICE

21. AT THIS POINT, THE SCREW-EYES SHOULD BE ATTACHED TO THE CEILING, WITH DISTANCE OF 98 CM BETWEEN THEM

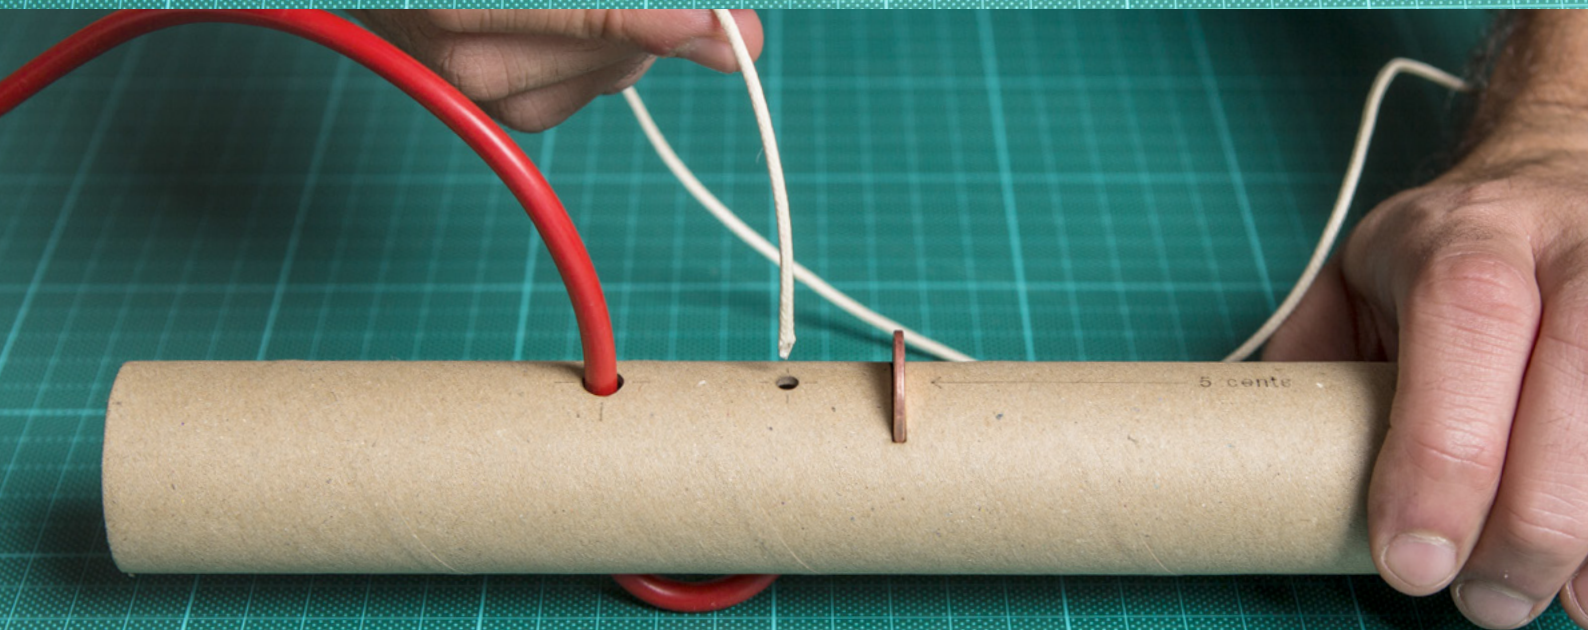

22. PUSH IN THE CORD NEXT TO THE COIN

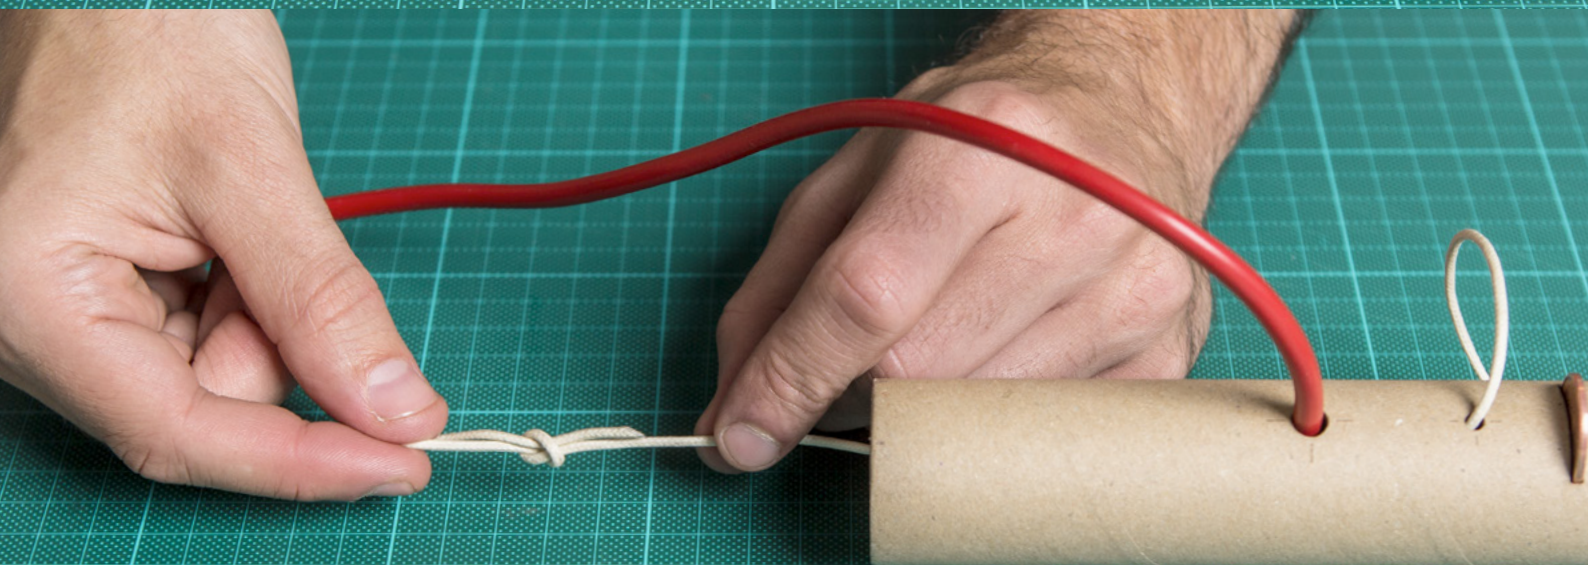

23. PULL OUT AT THE OPEN END AND TIE A KNOT



24. AFTER PULLING THE ROPE

THROUGH BOTH SCREW-EYES, PUSH THE END

OF THE ROPE THROUGH THE HOLE AS SHOWN HERE



25. BEND THE END OF THE ROPE




26. PUSH THE END BACK IN THE

TUBE AND THROUGH THE LAST HOLE

(THIS REQUIRES A BIT OF SKILL)

27. PULL THE ROPE TO CREATE THE DESIRED HEIGHT,
AND PULL IT OVER THE ARROW INDICATED ON THE
CARDBOARD TUBE.

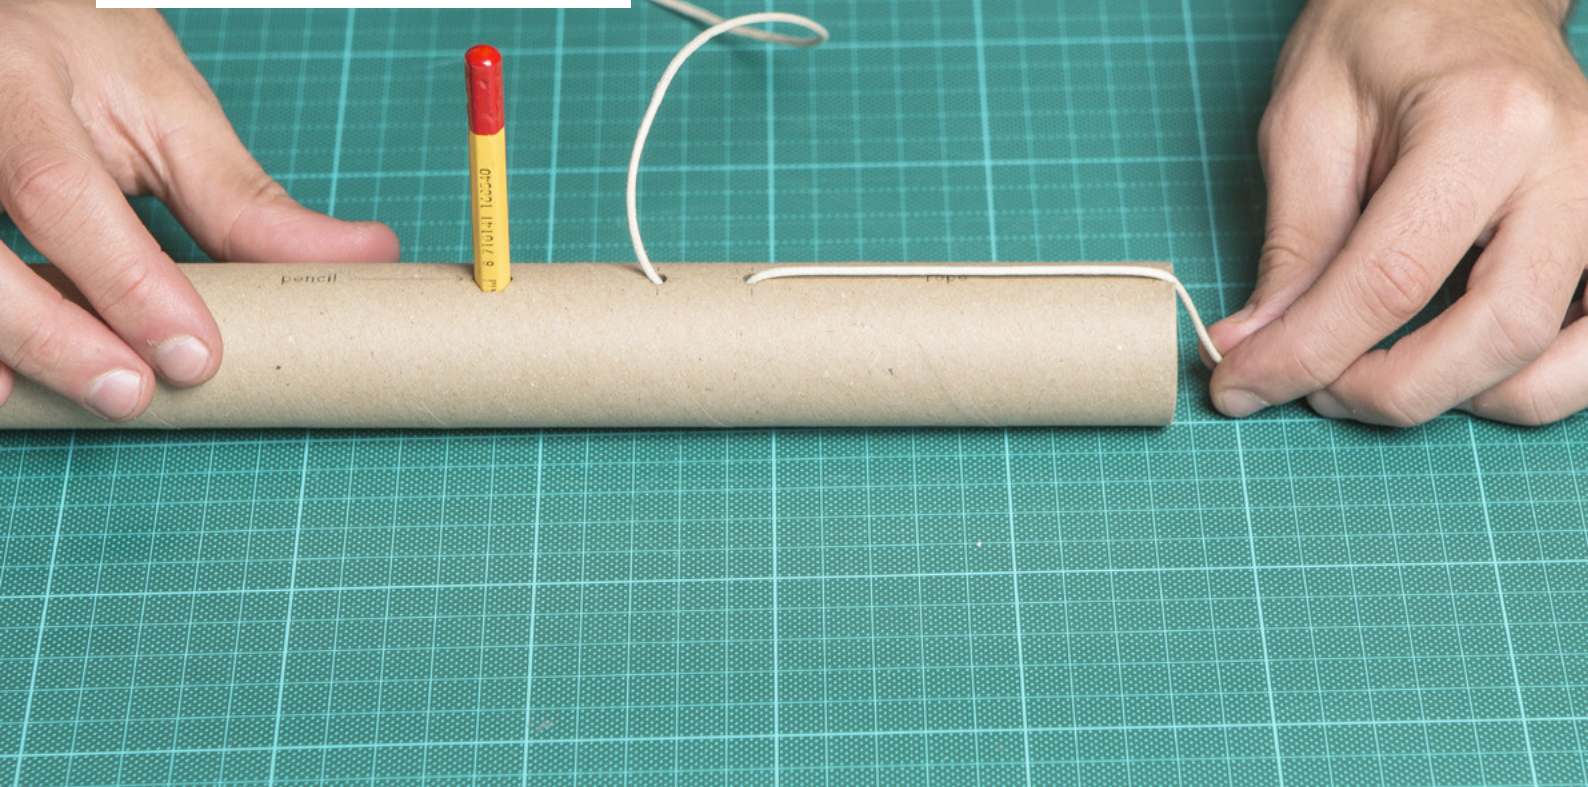

28. PUSH IN THE EXCESS ROPE, AND PUSH THE CORK
IN TO FIX THE LAMP AT THE DESIRED HEIGHT

